

Thank you for purchasing the KRG Enclosed forend!

INST-TUB-T3S-ARC

Arca Rail Enclosed Forend for Tikka T3 SA



Contents of Package:

- Arca Rail Enclosed Forend, assembled
- Baggie with following contents:
 - 6ea Button Head M5 x 25mm screws




Safety Warning: Before you attempt any installation, make sure your rifle is unloaded. Also, before starting remove the bolt and magazine from the rifle.

Installation Instructions:

Step 1: Remove forend from stock.


Step 2: Slide Arca Rail Enclosed Forend onto backbone as shown.

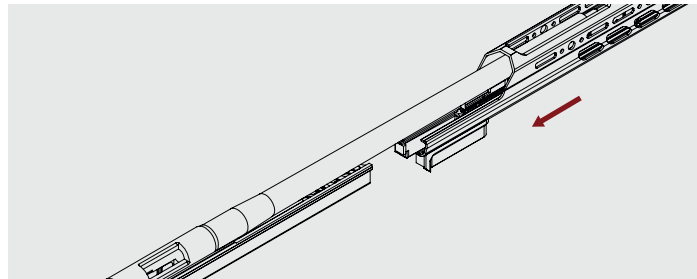

Step 3: Insert and tighten included forend screws. Use the 6x Button Head M5 x 25mm screws.

Partially thread all screws into place before fully tightening any screw. Blue thread locker may be used on button head screws, but not flat head.

Recommended torque: 24 in-lbs

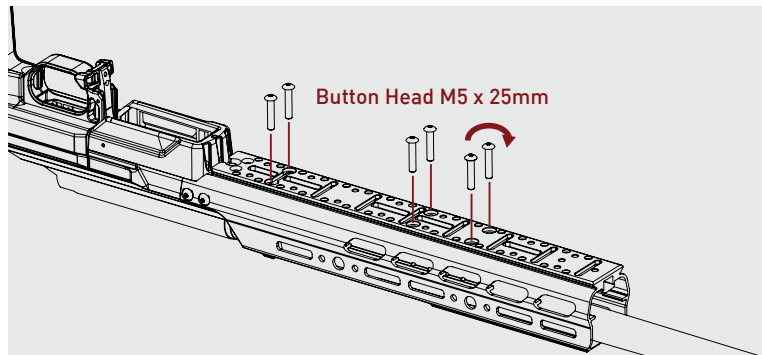

Forend Mounting points:

